



REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	5/3/2017	SM	JAG

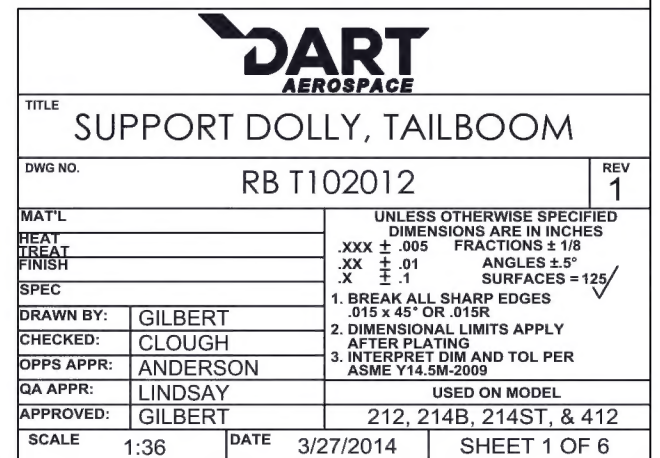

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED





ASSY QTY	ASSY QTY	B/O	Part #	QTY.	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	MAIN FRAME		RB T102012-1	1
			-3	1	FRONT PIVOT SUPPORT ASSEMBLY		RB T102012-3	1
	X		-5	1	LIFT ARM WELDMENTS		RB T102012-5	1
	1		-7		TOW BAR ARMS UPPER ASSEMBLY			1
	1		-9		TOW BAR ARMS LOWER ASSEMBLY			1
	1		-11		REAR ARM ASSEMBLY			1
	1		-13		REAR ARM STABILIZER ASSEMBLY			1
			-15	1	TOW SIDE LIFT		RB T102012-15	1
			-17	1	REAR LIFT ASSEMBLY		RB T102012-17	1
			-19	1	TOW BAR ASSEMBLY		RB T102012-19	1
		B/O	-195	8	HEX NUT	STEEL	5/16-18 (MCMASTER-CARR #95462A030)	1
		B/O	-197	8	WASHER	STEEL	Ø5/16 (MCMASTER-CARR #95229A450)	1
		B/O	-291	2	HEX HEAD CAP SCREW	STEEL	1/2-20 X 2 (MCMASTER-CARR #91257A748)	1
		B/O	-293	20	WASHER	STEEL	Ø1/2 I.D. (MCMASTER-CARR #90126A033)	1
		B/O	-295	18	HEX NUT	STEEL	1/2-20 (MCMASTER-CARR #94895A825)	1
			-323	2	MAIN FRAME 1 PIVOT PLATE	A36/1018/1020 HR		3
			-325	1	PIVOT ROD	4140/4142		4
			-327	2	PIVOT ROD SLEEVE	A513		5
		B/O	-329	2	ROLL PIN	STEEL	Ø1/8 X 1-1/4 (MCMASTER-CARR #90692A701)	1
		B/O	-331	8	BOLT	STEEL	3/8-24 X 1 (MCMSTER-CARR #92865A215)	1
		B/O	-333	22	FLANGE BEARING	BRONZE	SYMCO #SF-1420-10	1
			-335	4	CASTER ASSY		RB T102012-335	1
		B/O	-337	2	WASHER	STEEL	Ø1 (MCMASTER-CARR #90108A038)	1
		B/O	-339	4	BOLT	STEEL	5/8-18 X 5-1/2 (MCMASTER-CARR #91247A449)	1
		B/O	-341	4	WASHER	STEEL	Ø5/8 (MCMASTER-CARR #90126A035)	1
		B/O	-343	4	NYLOCK NUT	STEEL	5/8-18 (MCMASTER-CARR #95615A260)	1
		B/O	-345	2	ROD END		MCMASTER-CARR #60645K161	1
		B/O	-347	8	BOLT	STEEL	5/16-18 x 1-1/4 (MCMASTER-CARR #92865A585)	1
		B/O	-349	2	HYDRAULIC PUMP		ENERPAC P80 MSC #80021603	1
		B/O	-351	1	HYDRAULIC CYLINDER		PRINCE #B200180ABAAA07B	1
		B/O	-353	16	BOLT	STEEL	1/2-20 X 1-1/2 (MCMASTER-CARR #92620A746)	1
		B/O	-355	1	HYDRAULIC CYLINDER		PRINCE # B200100ABAAA07B	1
		B/O	-357	2	FLOW CONTROLLER		PRINCE # WFC-600	1
		B/O	-361	2	STRAP	RED NYLON WEBBING	90" X 1.5" (STAN'S UPHOLSERY)	6
		B/O	-363	11	HOSE CLAMP	STEEL	Ø3/4 (MCMASTER-CARR #3225T6)	1
		B/O	-365	11	STANDOFF	STEEL	1/4-20 X 3/4 (MCMASTER-CARR #93620A194)	1
		B/O	-367	2	ADAPTER FITTING	STEEL	MALE 3/4-16 UNF TO MALE 3/8" NPTF (MCMASTER-CARR # 50925K331)	1
		B/O	-369	1	PIPE NIPPLE	304 S.S.	3/8 NPT X 3-1/2 (MCMASTER-CARR #46755K133)	1
		B/O	-371	1	PIPE NIPPLE	316 S.S.	3/8 NPT X 2 (MCMASTER-CARR #4475K33)	1
		B/O	-373	2	ELBOW	STEEL	FEMALE TO FEMALE 3/8 NPTF (MCMASTER-CARR #50925K153)	1
		B/O	-375	11	SCREW	S.S.	1/4-20 X 1/2 (MCMASTER-CARR #91772A537)	1
		B/O	-377	2	45° ELBOW	STEEL	MALE 3/8" NPTF TO FEMALE 3/8" NPTF (MCMASTER-CARR # 50925K181)	1
		B/O	-379	1	LOWER FRONT HOSE ASSY		MALE 3/8 NPTF END FITTINGS, Ø 3/4, 130 IN LENGTH	1
		B/O	-381	2	SWIVEL FITTING	STEEL	MALE 3/8" NPTF TO FEMALE 3/8" NPT (MCMASTER-CARR # 5340K36)	1
		B/O	-383	1	REAR HOSE ASSEMBLY		MALE 3/8 NPTF END FITTINGS, Ø 3/4, 98 IN LENGTH	1
		B/O	-385	11	BOLT	STEEL	7/16-20 x 3 (MCMASTER-CARR #91257A704)	1
		B/O	-387	11	WASHER	STEEL	Ø7/16 (MCMASTER-CARR #95229A520)	1
		B/O	-389	11	NYLOCK NUT	STEEL	7/16-20 (MCMASTER-CARR #95615A190)	1
		B/O	-391	2	PIN W/ HAIRPIN	STEEL	1/2 x 1-1/4 (MCMASTER-CARR # 97245A709)	1
	ASSY -5							

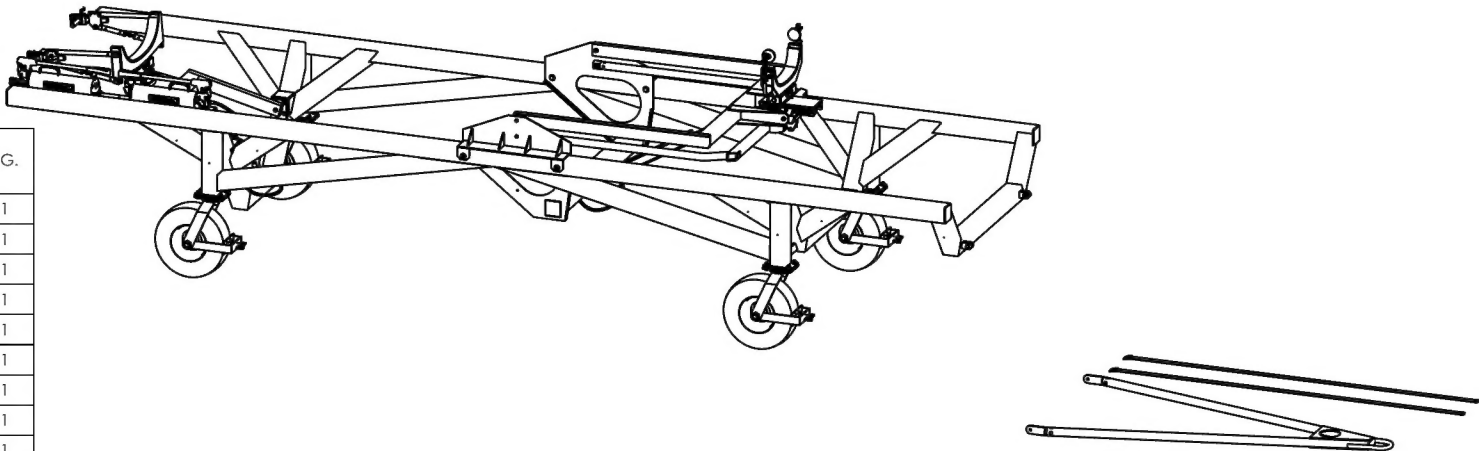

TITLE SUPPORT DOLLY, TAILBOOM	
DWG NO. RB T102012	REV 1
MAT'L HEAT TREAT FINISH SPEC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ±.5° .X ± .1 SURFACES = 125/✓	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: GILBERT	
CHECKED: CLOUGH	
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
USED ON MODEL 212, 214B, 214ST, & 412	
SCALE 1:46	DATE 3/27/2014
SHEET 2 OF 6	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL

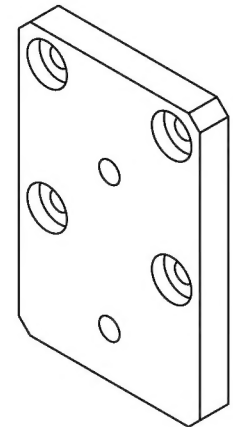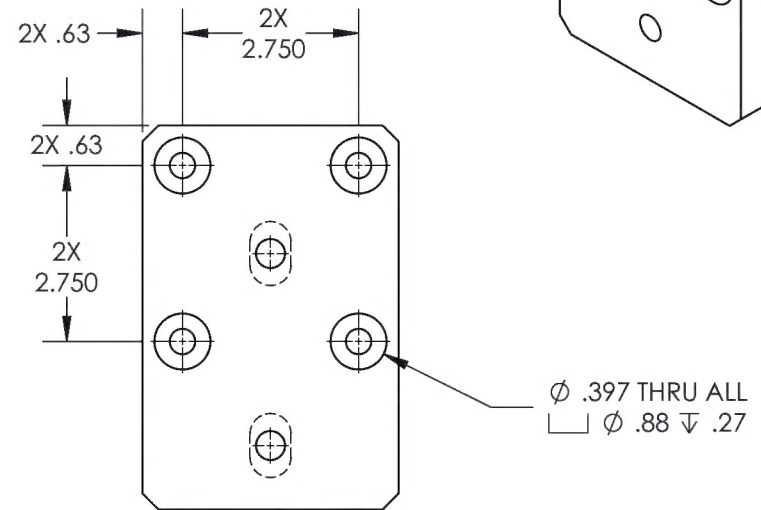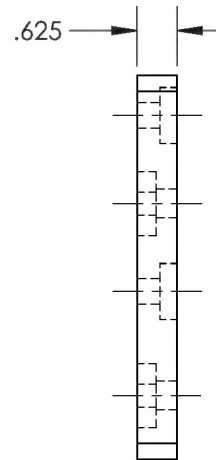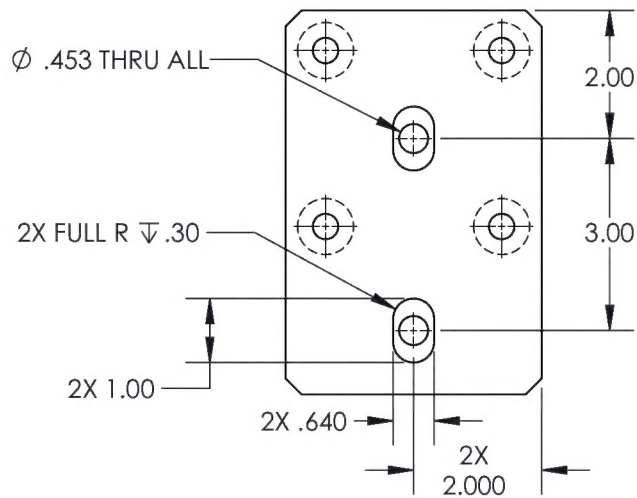




-323

MAIN FRAME 1 PIVOT PLATE

DART AEROSPACE	
TITLE SUPPORT DOLLY, TAILBOOM	
DWG NO. RB T102012-323	REV 1
MAT'L A36/1018/1020 HR	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH ZINC PLATE	.XXX ± .005 FRACTIONS ± 1/8
SPEC ASTM B633 TYPE I SC 2	.XX ± .01 ANGLES ± 5°
DRAWN BY: GILBERT	.X ± .1 SURFACES = 125°
CHECKED: CLOUGH	1. BREAK ALL SHARP EDGES
OPPS APPR: ANDERSON	.015 x 45° OR .015R
QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY
APPROVED: GILBERT	AFTER PLATING
SCALE 1:3	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
DATE 3/13/2014	USED ON MODEL
SHEET 3 OF 6	BELL 212, 214B, 214ST, 412

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

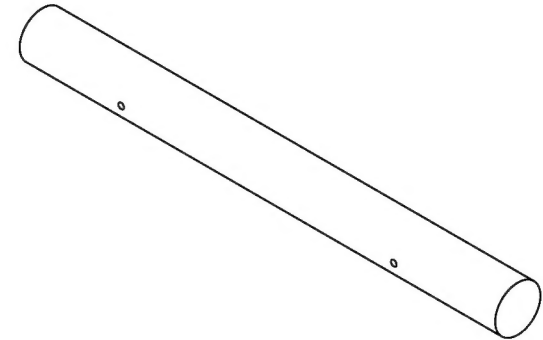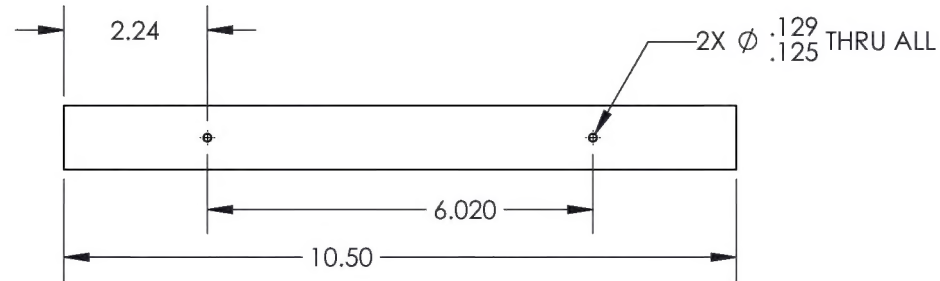




(-325)

PIVOT ROD

DART AEROSPACE	
TITLE SUPPORT DOLLY, TAILBOOM	
DWG NO. RB T102012-325	REV 1
MAT'L 4140/4142	UNLESS OTHERWISE SPECIFIED
HEAT RC 28-34	DIMENSIONS ARE IN INCHES
FINISH ZINC PLATE	.XXX ± .005 FRACTIONS ± 1/8
SPEC ASTM B633 TYPE I SC 2	.XX ± .01 ANGLES ± .5°
	.X ± .1 SURFACES = 125/✓
DRAWN BY: GILBERT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	212,214B,214ST, & 412
SCALE 1:3	DATE 3/26/2014
	SHEET 4 OF 6

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

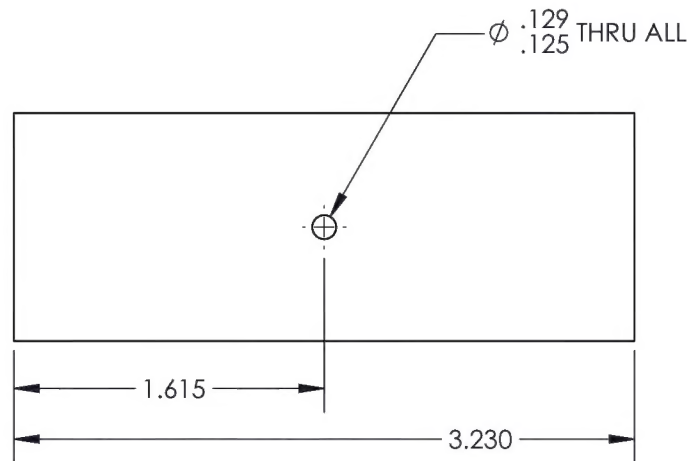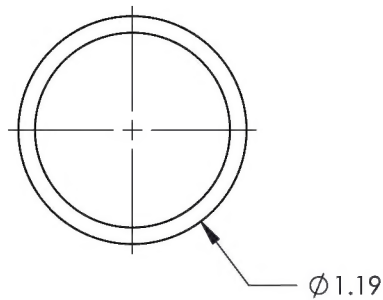


(-327)

PIVOT ROD SLEEVE

DART AEROSPACE	
TITLE SUPPORT DOLLY, TAILBOOM	
DWG NO. RB T102012-327	REV 1
MAT'L A513	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH POWDER COAT YELLOW	.XXX ± .005 FRACTIONS ± 1/8
SPEC FED #13538	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125°
DRAWN BY: GILBERT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
SCALE 1:1	DATE 3/26/2014
	SHEET 5 OF 6

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS			
REV	ECR	DESCRIPTION	DATE
			INITIAL
			APPROVED

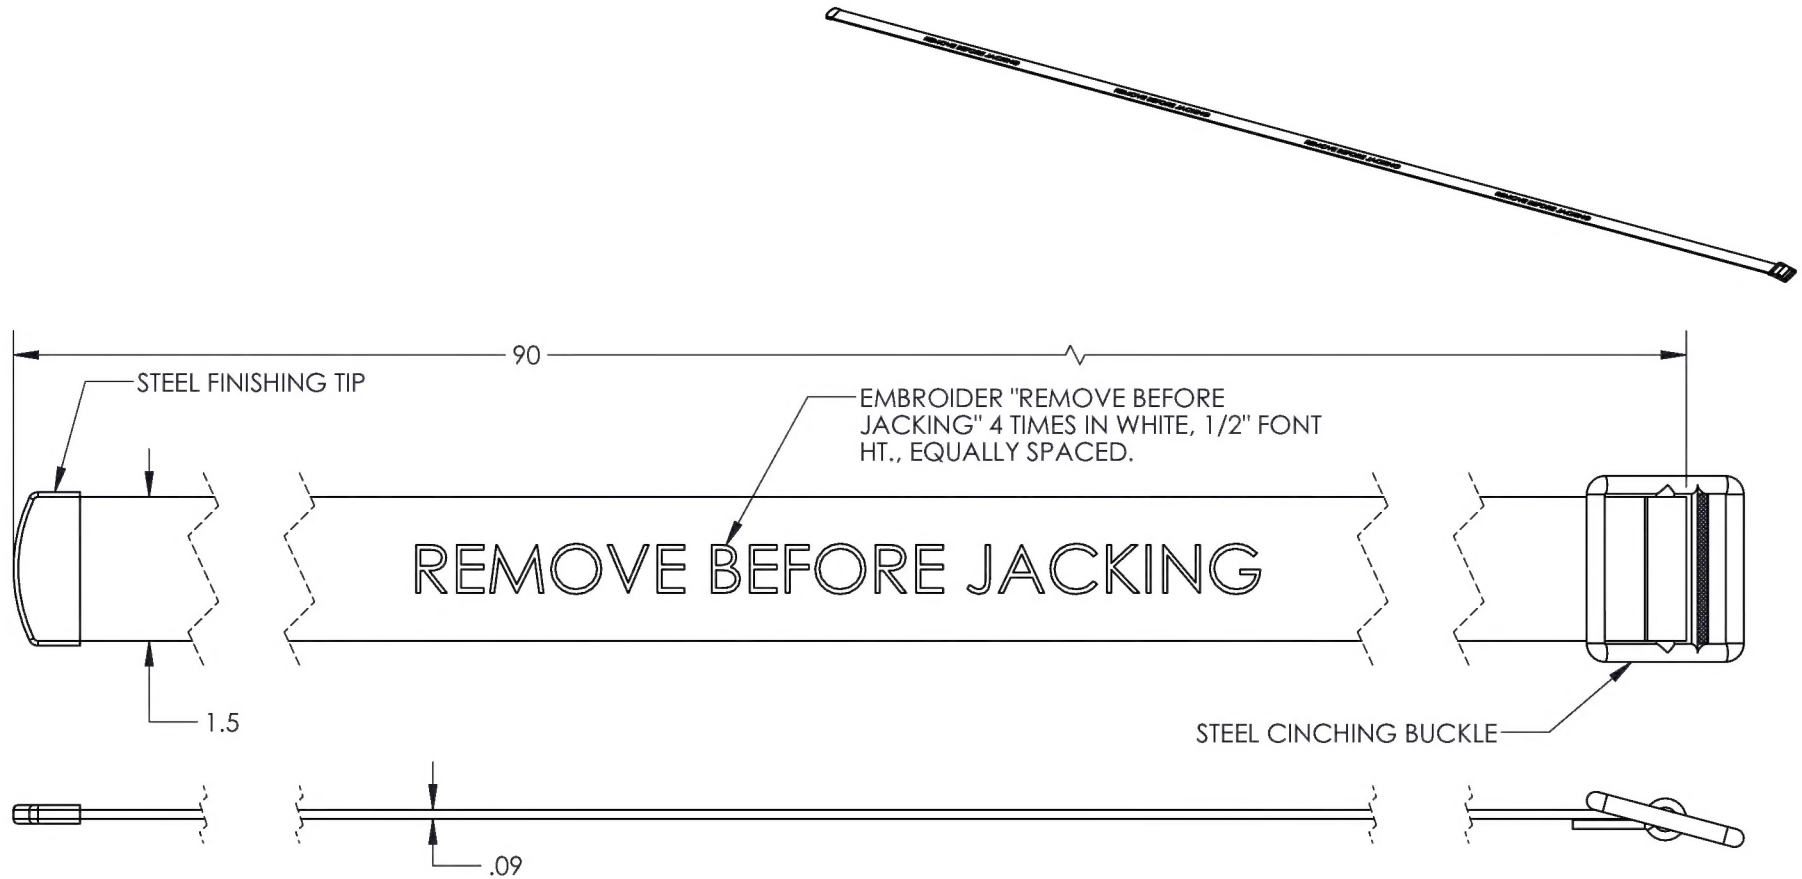

(-361)

STRAP

DART AEROSPACE	
TITLE SUPPORT DOLLY, TAILBOOM	
DWG NO. RB T102012-361	REV 1
MAT'L RED NYLON WEBBING	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
.XXX ± .010 FRACTIONS ± 1/8	
.XX ± .03 ANGLES ± 1°	
.X ± .1 SURFACES = 125°	
SPEC	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY:	MACKOVJAK
CHECKED:	CLOUGH
OPPS APPR:	ANDERSON
QA APPR:	LINDSAY
APPROVED:	GILBERT
SCALE	1:2
DATE	11/16/2016
SHEET 6 OF 6	